



[www.monoequip.com](http://www.monoequip.com)

Enter **Serial No.** here. \_\_\_\_\_

In the event of an enquiry please quote this serial number.



# **Mxg OVEN**

## **IMPORTANT INFORMATION and INSTALLATION INSTRUCTIONS**


### **ECOTOUCH CONTROL**

**MONO EQUIPMENT**  
**Queensway**  
**Swansea West Industrial Estate**  
**Swansea. SA5 4EB UK**

Tel. +44(0)1792 561234  
email: [spares@monoequip.com](mailto:spares@monoequip.com)  
Spares Tel.+44(0)1792 564039  
Fax. 01792 561016

**COMPLETE OPERATION AND MAINTENANCE INSTRUCTIONS  
ARE AVAILABLE ON CD or [www.monoequip.com](http://www.monoequip.com)**


**FILE 76**



## DECLARATION OF CONFORMITY

We hereby declare that this machine complies with the essential health and safety requirements of :-

- The Machinery Directive 2006 / 42 / EC
- The Low voltage Directive 2014 / 35 / EU
- The requirements of the Electromagnetic Compatibility Directive EN 55014-1:2006 + A1:2009 + A2:2011  
EN 55014-2:1997 + A1:2001 + A2:2008
- The General Safety of Machinery and food processing Standards applicable
- Materials and Articles intended to come into contact with food Regulation (EC) No. 1935 / 2004
- Tested in accordance with BSEN 203-1:2014, BESN203-2-2:2006 and BSEN 203-3:2009

Signed	
G.A.Williams – Quality Manager	

Date	
------	--

Machine FG Code.		Machine Serial No.	
---------------------	--	-----------------------	--

A technical construction file for this machine is retained at the following address:

**MONO EQUIPMENT**  
Queensway,  
Swansea West Industrial Park,  
Swansea  
SA5 4EB, UK

**MONO EQUIPMENT** is a business name of **AFE GROUP Ltd**  
Registered in England No.3872673 VAT registration No.923428136

Registered office: Unit 9, Bryggen Road,  
North Lynn Industrial Estate,  
Kings Lynn,  
Norfolk,  
PE30 2HZ

# **NOTE**

**All reference to RIGHT HAND ovens means that main door is hinged on the right and the control panel is on the left.**



**RIGHT HAND**

---

**All reference to LEFT HAND ovens means that main door is hinged on the left and the control panel is on the left.**

**Thank you for purchasing the MONO MXg ecotouch oven.  
A combination of clean industrial design and the latest technology.  
The following information should get your purchase running without any problems**

If you have a problem with your purchase please contact MONO EQUIPMENT at:

**MONO EQUIPMENT**  
**Queensway**  
**Swansea West Industrial Estate**  
**Swansea. SA5 4EB UK**  
Tel. +44(0)1792 561234

## **SAFETY**

---

- 1 This oven is designed for baking bread, confectionery and savoury bakery products. Do not use it for other items without consulting with **MONO**.
- 2 This appliance is not intended for outdoor use.
- 3 This appliance is not intended for residential use.
- 4 It is essential for proper and safe operation of the oven that users are familiar with its operation and use.  
*Read the instructions provided in this document before use.*
- 5 EVERY OVEN INSTALLATION MUST BE APPROVED BY THE LOCAL AUTHORITY  
*Neither the manufacturer, nor the vendors are liable in respect of accidents or damage where the purchaser/installer has not obtained such approval.*
- 6 Connection of the oven to the local gas supply is the responsibility of the installer, who should be a "Gas Safe" registered engineer using components that conform to the current industry standards.
- 7 It is the responsibility of the installer to ensure that an adequate supply of combustion air to the oven (see *Specifications* section for details) and the evacuation of combustion products are permanently in place.
- 8 An emergency isolation valve must be fitted in the gas supply and be well marked and accessible to operators.
- 9 No change is permitted to the gas group or family from that which is specified for this oven.
- 10 Parts of the oven that are protected by paint are not to be adjusted.  
*Do not adjust these parts.*
- 11 Unauthorised service or repairs to these ovens may cause personal injury or damage to the equipment, which may invalidate warranty agreements.
- 12 Only qualified engineers appointed by MONO EQUIPMENT should carry out service and repairs to this equipment.

- 13 Electrical panels and electrical distributor boxes should not be opened until the main supply to the oven has been turned off.
- 14 When choosing and installing a flue, the precautions and instructions in this manual must be observed.
- 15 All connections to this oven must be made in accordance with the statutory and technical regulations of the country in which the oven is installed.
- 16 When work is being carried out inside the oven, the electrical mains isolator must be turned off and locked.
- 17 Whenever there is someone working inside the oven, the baking compartment door should be wedged open and a suitable warning notice hung on the door to prevent it being accidentally closed.
- 18 While the oven is in operation, and for some time after having been in operation, it is dangerous to touch the window glass or the metal surfaces in its vicinity. The oven must be allowed to cool before any form of cleaning is started.
- 19 Use only **MONO** spare parts for this oven.
- 20 The construction of the oven must not be changed.
- 21 Customers operating this oven in a hard water area must ensure that an efficient water-softening device protects the water supply to the equipment.
- 22 Oven gloves should be worn when moving products in or out of the oven.
- 23 The owner of the oven is **legally obliged to instruct staff** using the oven in its operation and in these safety regulations. The instruction manual for the oven must not be removed from the oven work area.


**WARNING: WHEN DOING ANY MAINTENANCE ON TOP, KEEP CLEAR OF THE RECTANGULAR FLUE PIPE TOWARDS THE FRONT RIGHT HAND SIDE OF THE ROOF. VERY HOT AIR IS EJECTED.**

- 24 Moving parts remain unguarded on the oven roof as this area is out of reach of the operator and therefore deemed safe. Care must be taken to avoid these motorised parts when maintenance tasks are performed.
- 25 Unless trays/containers for the purpose of holding the oven products are supplied with the oven by the manufacturer, it is the responsibility of the customer to ensure that the nature and surface conditions of materials likely to come into contact with food shall be such that they cannot contaminate or spoil the food.

- 26 The oven's main door has a safety release foot-plate on its inner side allowing the door to be opened from inside in an emergency lock-in situation.

## EMERGENCY INTERNAL-DOOR RELEASE PEDAL

THE MAIN DOOR CAN BE OPENED FROM INSIDE BY PUSHING DOWN ON THE PEDAL LOCATED ON THE LOWER RIGHT HAND SIDE OF THE DOOR

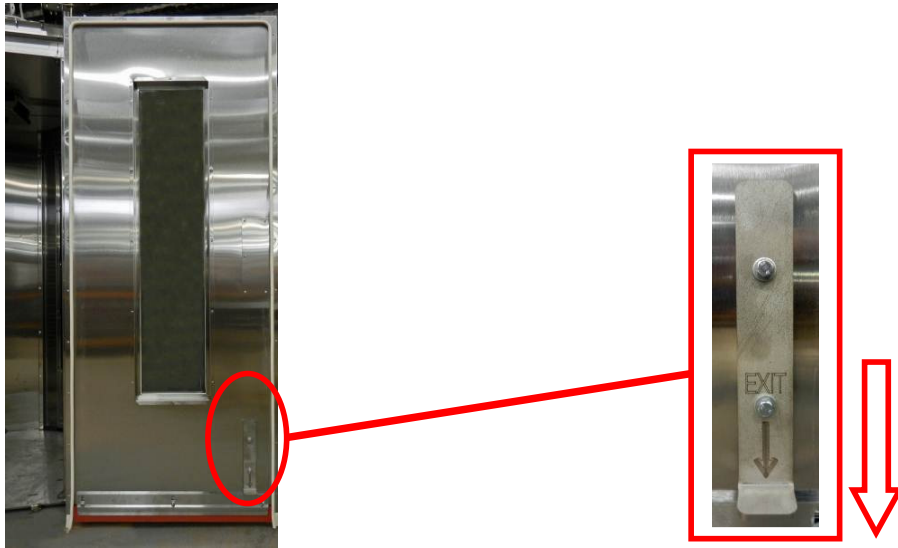

# INSTALLATION

---

- 1 The **MONO MXTg** oven is designed to operate as a freestanding unit, and must not be bolted down or fixed to the floor in any way.
- 2 The concrete floor beneath the oven must be smooth, flat and clear of any obstructions, and must be at least 150mm (6") thick.
- 3 The foundation must be flush with the overall bakery floor because racks are wheeled up a ramp (supplied with the oven) into the baking chamber.
- 4 A minimum headroom clearance of 3 metres (180") between the floor and the bakery ceiling must be maintained at all times.

## 5 WATER SUPPLY

The water supply to the oven shall be fitted with protective means against backflow in the water supply and installed according to the national regulations in force. Minimum pressure should be 2 bar - 4bar.

Domestic pressure is usually within this parameter.

Customers in hard water areas must ensure that an efficient water treatment device protects the supply to the oven. It is the customers' responsibility to install and maintain an adequate water supply to the oven, which should comply with local water regulations.

Connect to a suitable water supply, making sure that the pipes are flushed out to remove all foreign bodies i.e. flux or solder.

## NOTE

Set up of the pressure regulator should not be required as it is factory set to the optimum setting 1.5 bar to provide the best steam during a bake.

- 6 Pipework from the gas supply to the oven shall be arranged so as to not require removal of the burner for routine maintenance tasks.
- 7 Parts of the oven that are protected by paint are not to be adjusted.  
*Do not adjust these parts.*
- 8 Pipework connections shall be achieved either by threaded joints conforming to EN10226-1 (taper-parallel threads) or EN10226-2 (taper-taper threads), each sealed with compound or tape suitable for the gas specified for this oven, or by compression fittings.

## OVEN EVACUATION

It is recommended that evacuation of the oven baking chamber products is achieved with a hood covering the entire oven top and projecting beyond the front of the oven by 600mm. the extraction rate from the hood should be approximately 1700m<sup>3</sup>/h.

The oven is a Type B appliance requiring an 8" flue to evacuate the products of combustion to the outside of the room containing the oven and the combustion air to be drawn from that room.

The customer is responsible for providing adequate levels of make-up air.

## **GAS CONNECTION**

Ovens will be supplied with a 2 stage bespoke burner that will be set-up prior to dispatch.  
The burner is suitable for use with natural gas only.

The burner outputs at 50kW (high mode) and 8.5kW (low mode).

Heat output	Gas pressure at connection point	Gas flow with burner in operation
50kW	20.0 mbar	5.16 m <sup>3</sup> /h

*Note: Burner installation and start-up should be carried out by an authorized technician.  
Local regulations for gas installations must be followed.*

*Do not use the burner with other gas types than indicated on the type plate.*

*Repair and maintenance to be carried out by an authorized service engineer.*

## **FLUE GAS CONNECTION**

Connection on oven : Outside diameter 130mm dia

Draft Conditions: There must be a negative pressure of 1-5mm WG in the combustion chamber. If the pressure is higher than 0mm WG in service, a flue gas fan must be installed.

Temperature: The gas exhaust flue must be capable of withstanding a temperature of at least 400 deg C.

Heat output	Flue gas temperature	Flue gas quantity
50kW	400 deg C	150 m <sup>3</sup> /h

*Note: None of the flue gas ducts should slope downwards or be horizontal (if no flue gas fan is installed). The slope must be upwards towards the chimney.*

*Avoid too many sharp elbows*

## **INITIAL BURNING-OFF PROCEDURE**


All ovens undergo a burn-off procedure in the factory before being dispatched.



# ISOLATION

---

In case of an emergency, switch oven off at the mains electrical isolator switch and gas mains tap.

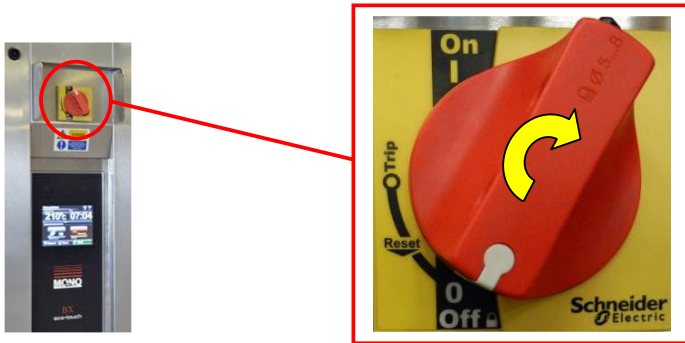

**MAINS ELECTRICAL  
ISOLATOR SWITCH  
On main control door.**

**NOTE:**

**AS SOME PARTS STAY ELECTRICALLY LIVE AFTER THE ISOLATOR SWITCH ABOVE IS OPERATED, ENSURE THE OVEN IS DISCONNECTED FROM THE CONSUMER POWER SUPPLY (MAINS) IF WORKING ON THE ELECTRICAL BOX AND PANEL.**



**TYPICAL GAS  
ISOLATING VALVE  
Installed near oven.**

# DAILY CLEANING INSTRUCTIONS

## **Caution**

**Do not use high-pressure equipment to clean the oven.**

The oven has been designed with sealed components, which are used wherever possible. The minimum of routine cleaning is required, but it is essential that it be properly and regularly carried out.

1. Sweep out debris from the oven floor daily.
2. Clean up spillages of product on the oven floor.
3. Wipe off splashes on door window.

Do not use alkaline or abrasive detergents when cleaning the oven.  
Do not use detergents on the control panel overlay – wipe with a damp cloth only.

**Note:** *Buildup of spillages may result caused by incorrectly placed racks. Also check for damage to door seals, particularly if operators are careless with rack handling.*

## **GAS BURNER**


For cleaning, service and maintenance of the burner please contact an authorised expert company.

# BASIC OPERATION - ECOTOUCH


ALL OPERATIONS ARE ACTIVATED BY TOUCHING AREAS ON THE SCREEN, WHICH WILL PASS YOU ON TO THE NEXT INFORMATION PANEL.

DO NOT USE EXCESSIVE FORCE.  
(THE PRESSURE REQUIRED TO OPERATE THE PANEL CAN BE ALTERED IN THE SETTINGS SECTION)

TOUCH THE SCREEN  
ON THE AREA YOU  
REQUIRE TO  
ACTIVATE

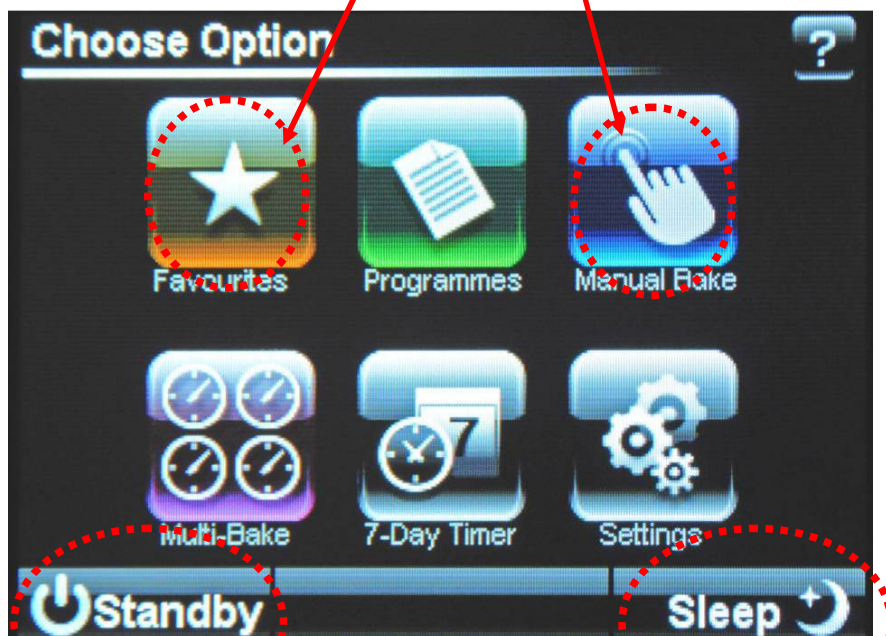

STANDBY  
THE OVEN TURNS OFF.  
TOUCH THE SCREEN TO GO TO  
THE OPTION SCREEN.



SLEEP  
THE OVEN STAYS AT 100c AND  
HEATS TO LAST PROGRAM  
TEMPERATURE WHEN THE  
SCREEN IS TOUCHED.  
OPTION SCREEN THEN SHOWS.