

Compact 643 3-Tray Convection Oven



Limited kitchen space needn't hamper your ability to offer your customers a wide range of hot food and MONO Equipment's space saving Compact 643 Convection Oven is ideal for businesses that need to offer a diverse and extensive range of hot food.

With a three-tray capacity, the Compact 643 Convection Oven features a very simple and intuitive LED control panel which is capable of storing up to 10 programmes.

The Compact 643 Convection Oven also takes standard Gastronorm GN1/1 and 60cm x 40cm tray sizes making them truly versatile.



Features and Benefits

- Available in 3-tray format
- Suitable for food-2-go outlets, cafes, restaurants, convenience stores, hotels and petrol stations
- Takes both 400mm x 600mm and gastronorm GN1/1 tray sizes
- Provides a perfect countertop solution where space is limited
- Integrated steam system for superb bake quality
- Simple Digital Control Panel
- Stores up to 10 bake programmes
- Temperature range between 50°C to 250°C
- 72mm height between trays
- Energy saving auto shutdown feature prevents the oven from using costly energy when left on for long periods of time or overnight, by mistake
- Available with a 13amp single phase power supply
- 2.7kW power rating
- Bi-directional fan for uniform heat distribution
- Removable tray supports for easy cleaning
- Overlapped and sealed, foil-fronted solid slab insulation for superb heat retention
- Internal oven light for clear visibility of the baking process
- Stainless steel construction for durability and cleanliness
- Stackable for convenience and future expandability
- Clear glass door to maximise the visibility of the baking product
- Twin-pane, vented glass reduces external door temperature
- Supplied with 4 free 400mm x 600mm trays
- Optional racked base unit available


Specifications and Dimensions

Specifications	Compact 643 3-Tray
Tray Size	600mm x 400mm & Gastronorm GN1/1
Distance between trays	72mm (2 ¾")
Height	450mm (17 ¾")
Width	800mm (31 ½")
Depth, door closed including handle	800mm (31 ½")
Depth, door fully open	1,065mm (42")
Weight	55kg (121 lbs)
Electrics:	
Power Supply	Single Phase, 230v, 50Hz, 13Amp

Please contact MONO Equipment for USA electrical details.



Optional Extras and Configurations
 Racked Base Unit for Compact 643 and Compact 644

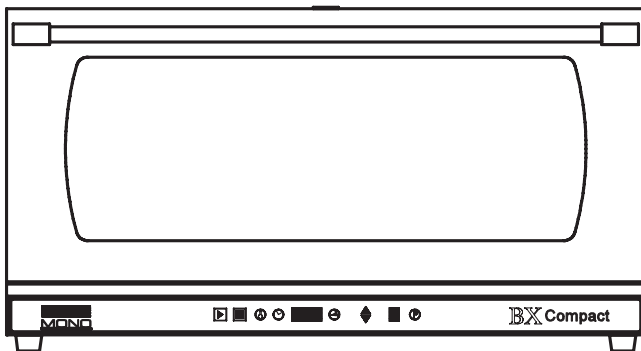

Twin pane vented glass reduces external door temperature

